## Sealing rail for rotary piston engine has packing piece provided with sealing body divided into 2 parallel halves acted on by spring element with separation element between them

Publication number: DE19935234

**Publication date:** 

2000-11-09

Inventor:

FOERSTER ANDREAS (DE); SCHIFFLER STEFAN

(DE)

Applicant:

MANNESMANN SACHS AG (DE)

Classification:

- international:

F01C19/04; F15B15/12; F01C19/00; F15B15/00; (IPC1-

7): F16J15/16; F01C19/00; F04C9/00; F04C27/00

- european:

F01C19/04; F15B15/12

**Application number:** DE19991035234 19990728 **Priority number(s):** DE19991035234 19990728

Report a data error here


Also published as:

US6428010 (B1)

FR2797021 (A1)

## Abstract of **DE19935234**

The sealing rail (41) has a packing piece fitted into a groove, provided with a sealing body (67), which is held under tension in the longitudinal direction of the groove. The packing piece is divided in the longitudinal direction, with at least one spring element contained in a pocket-shaped recess between its parallel halves, with a separation element between the later, at least at the edge of the packing piece provided with the sealing body.

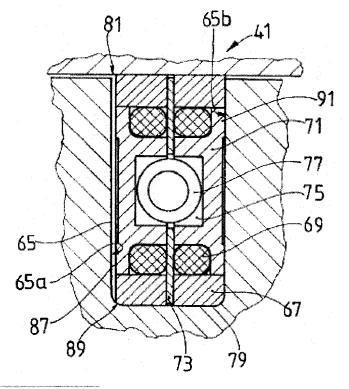

Data supplied from the esp@cenet database - Worldwide